


HOW TO ORDER

2009

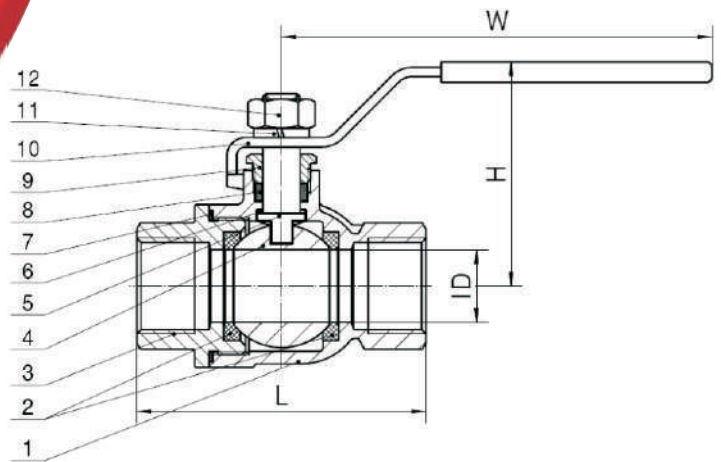

Model

Size 1/4" - 4"



Available

For Example : 2009-3/4"

Features :

Full Port

W.P.: 600PSI(PN63)

W.T.: -20°C~250°C(-4°F~482°F)

1/4"-4"

Investment Casting Body & Cap

Blow-Out Proof Stem

Type of Drive: Manual

Thread End:

ANSI B1.20.1(NPT)

ISO228/1 & DIN259(G)

DIN2999 & BS21(BSPT)

Material List

SIZE		ID	L	H	W
DN	NPS				
8A	1/4"	11.5	47	50	82
10A	3/8"	12	47	50	82
15A	1/2"	15	57	53	99
20A	3/4"	20	64	58	99
25A	1"	25	76.5	67	115
32A	1-1/4"	32	86	73	128
40A	1-1/2"	38	92	80	146
50A	2"	50	112	96	165
65A	2-1/2"	62	142	130	235
80A	3"	76	161	140	240
100A	4"	100	209	165	315

Dimension List

NO.	Component Name	Material	
1	Body	CF8M	CF8
2	Seat	PTFE	PTFE
3	Bonnet	CF8M	CF8
4	Ball	SS316	SS304
5	Stem	SS316	SS304
6	Gasket	PTFE	PTFE
7	Seal Ring	PTFE	PTFE
8	Packing	PTFE	PTFE
9	Packing Gland	S.S	S.S
10	Handle	S.S	S.S
11	Spring Washer	S.S	S.S
12	Hex Nut	S.S	S.S