



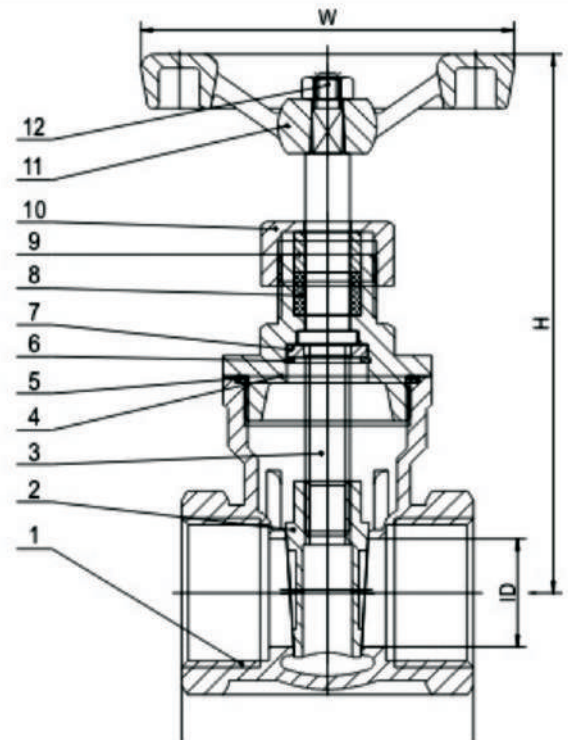

HOW TO ORDER

2204



Model

Size 1/2" - 2"



Available

For Example : 2204-3/4"

Features :

Full Port:

W.P.: 200PSI(PN16)

W.T.: -20°C~250°C(-4°F~482°F)

1/4"-3"

Investment Casting Body & Cap

Blow-Out Proof Stem

Type of Drive: Manual

Thread End:

ANSI B1.20.1(NPT)

ISO228/1 & DIN259(G)

DIN2999 & BS21(BSPT)

Material List

No.	Component Name	Material	
1	Body	CF8M	CF8
2	Disc	CF8M	CF8
3	Stem	SS316	SS304
4	Bonnet	CF8M	CF8
5	Seal Ring	PTFE	PTFE
6	Snap Spring	SS316	SS304
7	Gasket	SS316	SS304
8	Packing	PTFE	PTFE
9	Packing Gland	SS304	SS304
10	Gland Nut	SS304	SS304
11	Handwheel	HT(C.R)	HT(C.R)
12	Hex Nut	SS304	SS304

Dimension List

DN	NPS	ID	L	H	W
15	1/2"	14	51	85	72
20	3/4"	19	57	92	72
25	1"	24	63	105	78
32	1-1/4"	30	73	138	100
40	1-1/2"	37	75	145	100
50	2"	48	88	162	100