




HOW TO ORDER

2205

Size 1/2" - 2"

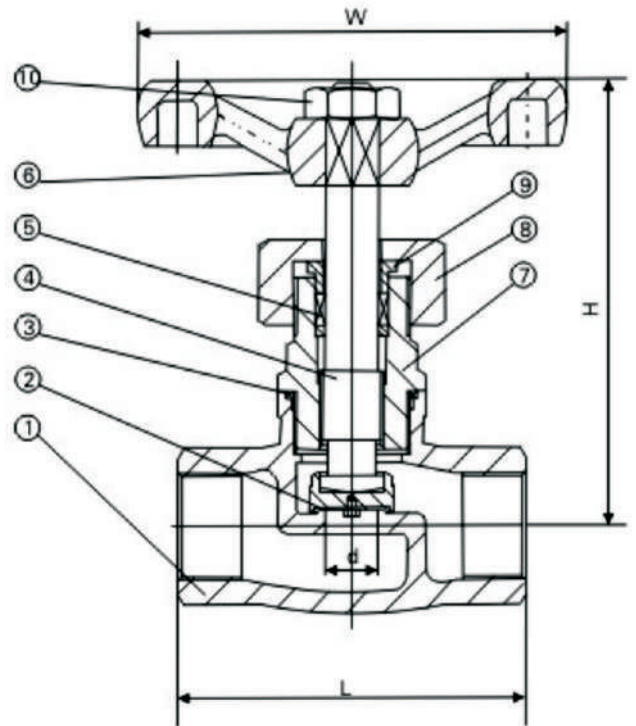

Model

Available

For Example : 2205-3/4"

Features :

Full Port

W.P.: 200PSI(PN16)

W.T.: -20°C~250°C(-4°F~482°F)

1/4"-3"

Investment Casting Body & Cap

Blow-Out Proof Stem

Type of Drive: Manual

Thread End:

ANSI B1.20.1(NPT)

ISO228/1 & DIN259(G)

DIN2999 & BS21(BSPT)

Material List

No.	Component Name	Material	
1	Body	CF8M	CF8
2	Disc	CF8M	CF8
3	Seal Ring	SS316	SS304
4	Stem	SS316	SS304
5	PTFE	PTFE	
6	Handwheel	HT(C.R.)	
7	Bonnet	CF8M	CF8
8	Gland Nut	SS202	
9	Packing Gasket	SS202	
10	Nut	Ss202	

Dimension List

ID	NPS	H	L	W
14	1/2"	90	60	73
17	3/4"	101	70	73
23	1"	110	80	80
28	1-1/4"	125	89	80
35	1-1/2"	143	105	100
45	2"	170	119	110