




HOW TO ORDER

3009

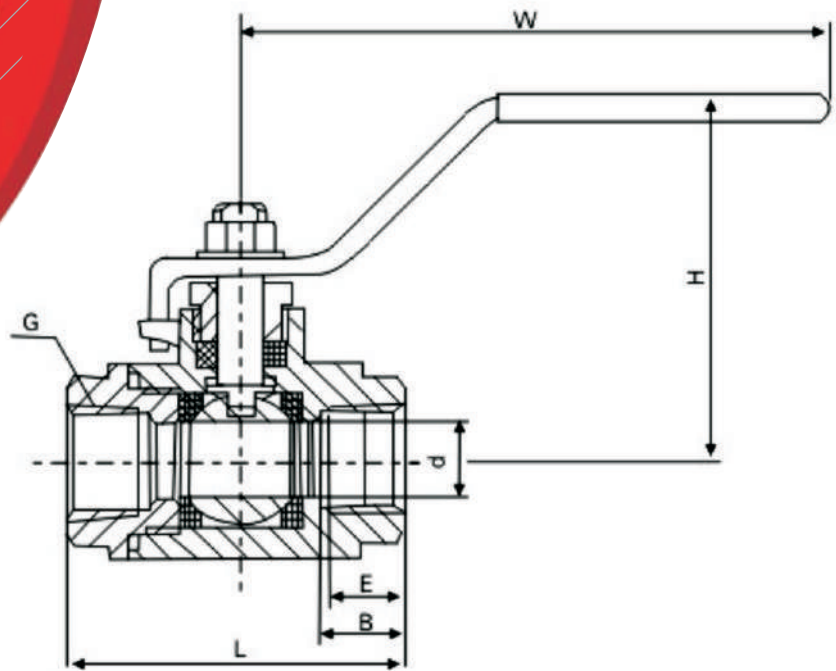

Model

Size 1/4" - 2"



Available

For Example : 3009-3/4"

Features :

Full Port

W.P: 1000PSI(PN63)

W.T: -20°C~250°C(-4°F~482°F)

1/4"-4"

Investment Casting Body & Cap

Blow-Out Proof Stem

Locking Device

Type of Drive: Manual

Thread End:

ANSI B1.20.1(NPT)

ISO228/1 & DIN259(G)

DIN2999 & BS21(BSPT)

Material List

No.	Component Name		Material	
1	Body	CF8M	CF8	WCB
2	Seat	PTFE/RTFE	PTFE/RTFE	PTFE/RTFE
3	Ball	SS316	SS304	SS304
4	Stem	SS316	SS304	SS304
5	Gasket	SS304	SS304	SS304
6	End Cap	SS316	SS304	SS304
7	Thrust Washer	PTFE	PTFE	SS202
8	Packing	PTFE	PTFE	SS202
9	Packing Gland	SS304	SS301	SS202
10	Handle	SS301	SS304	SS202
11	Spring Washer	SS304	SS304	PTFE
12	Hex Nut	SS304	SS301	PTFE
13	Lock	SS202	SS202	WCB

Dimension List

NPS	DN	ID	L	H	W
1/4"	6	11.5	54	48	95
3/8"	10	12.5	53	48	93
1/2"	15	15	60	57	95
3/4"	20	20	72	64	118
1"	25	25	85	72	110
1-1/4"	32	32	100	74	145
1-1/2"	40	38	105	84	162
2"	50	50	121	95	182
2-1/2"	65	65	156	135	235
3"	80	80	177	135	235
4"	100	100	224	160	320