




HOW TO ORDER

3010

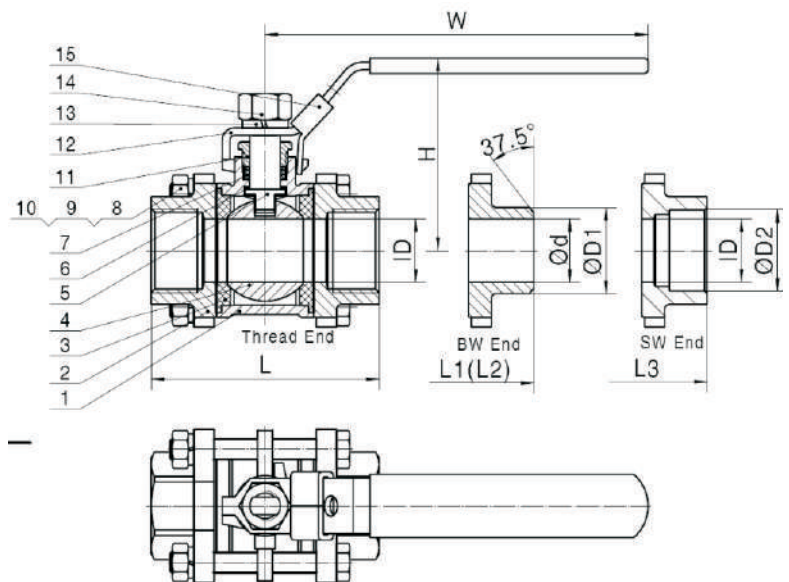

Model

Size 1/2" - 2"



Available

For Example : 3010-3/4"

Features :

Full Port

W.P: 1000PSI(PN63)

W.T.: -20°C~250°C(-4°F~482°F)

1/4"-4"

Investment Casting Body & Cap

Blow-Out Proof Stem

Locking Device

Type of Drive: Manual

Thread End:

ANSI B1.20.1(NPT)

ISO228/1 & DIN259(G)

DIN2999 & BS21(BSPT)

Material List

SIZE		ID	L	L1	L2	L3	H	W	d	D1	D2
DN	NPS										
6	1/4"	11.5	68	68		65	50	96	12	17	
10	3/8"	12.5	68	68		65	50	98	12	17	
15	1/2"	15	74	72		67	55	96	18	23.5	
20	3/4"	20	83	85		84	65	118	21.7	29	
25	1"	25	88	96		86	74	144	27	34	
32	1-1/4"	32	112	113		112	82	155	34	42	
40	1-1/2"	38	120	122.5		119	93	158	42	50	
50	2"	50	145	145		143.5	100	187	53	63	
65	2-1/2"	65	184	170		170	126	208	65	76	
80	3"	80	211	218		218	137	258	80	91	
100	4"	100	268	270		270	172	323	99	111	

Dimension List

NO.	Component Name	Material		
1	Body	CF8M	CF8	WCB
2	Bonnet	CF8M	CF8	WCB
3	Seat	PTFE	PTFE	PTFE
4	Ball	CF8M	CF8	CF8
5	Stem	F316	F304	F304
6	Thrust Washer	PTFE	PTFE	PTFE
7	Packing	PTFE	PTFE	PTFE
8	Hex Bolt	SS304	SS304	SS201
9	Hex Nut	SS304	SS304	SS201
10	Spring Washer	SS304	SS304	SS201
11	Packing Gland	SS304	SS304	SS201
12	Handle	SS304	SS304	SS201
13	Spring Washer	SS304	SS304	SS201
14	Hex Nut	SS304	SS304	SS201
15	Lock	SS304	SS304	SS201