


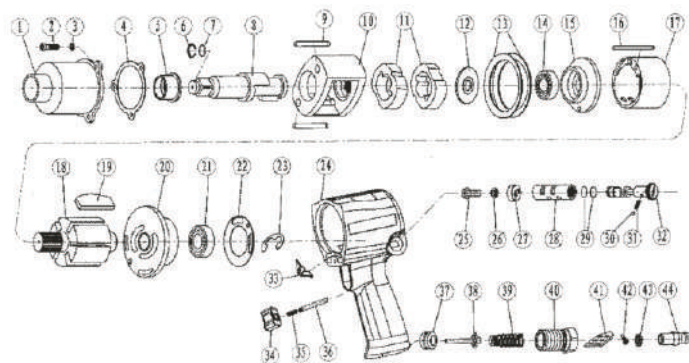

Features

- Durable Twin Hammer Impact Mechanism
- Adjustable Power Switch In Forward And Reverse
- Easy-to-service Two-piece Construction
- Great For Installing/ Tightening Or Remove Loosening Threaded Fasteners And For Other Work Shop Applications
- Handle Exhaust
- Super Power And Performance Features To Tackle The Toughest Jobs With Ease

Part No.	Description	Qty.	Part No.	Description	Qty.
1	Hammer Case	1	24	Motor Housing	1
2	Hammer Case Cap Screw	3	25	Reverse Valve Knob Screw	1
3	Hammer Case Lock Washer	3	26	Reverse Valve Knob Lock Washer	1
4	Hammer Case Gasket	1	27	Reverse Valve Knob	1
5	Hammer Case Bushing	1	28	Reverse Valve Bushing	1
6	Socket Retaining Ring	1	29	Reverse Valve	1
7	Socket Retainer O-Ring 4.7x2.4	1		Bushing Seal 10.5x1.6	2
8	Anvil	1	30	Reverse Valve Detent Ball	1
9	Hammer Pin	2	31	Reverse Valve Detent Spring	1
10	Hammer Frame	1	32	Reverse Valve	1
11	Hammer	2	33	Trigger Retainer	1
12	Hammer Frame Rear Washer	1	34	Trigger	1
13	Motor Clamp Washer	2	35	Trigger Spring	1
14	Front Rotor Bearing 16002	1	36	Trigger Pin	1
15	Front End plate	1	37	Throttle Valve Seat	1
16	Cylinder Dowel	1	38	Throttle Valve	1
17	Cylinder	1	39	Throttle Valve Spring	1
18	Rotor	1	40	Inlet Bushing	1
19	Vane	6	41	Exhaust Deflector	1
20	Rear Endplate	1	42	Cross Screw	1
21	Rear Rotor Bearing 6001	1	43	Filter Web	1
22	Endplate Gasket	1	44	Air Inlet Connection	1
23	Rear Rotor Bearing Retainer	1			

Specifications

MODEL	:	AT 239	AIR HOSE	:	3/8"
SQUARE DRIVE	:	1/2"	AVG AIR CONSUMPTION	:	8 CFM
FREE SPEED	:	7000 RPM	WORKING PRESSURE	:	6.3 BAR
MAX TORQUE	:	680NM	LENGTH × HEIGHT	:	195 × 193 MM
AIR INLET	:	1/4"	WEIGHT	:	2.75 KGS