


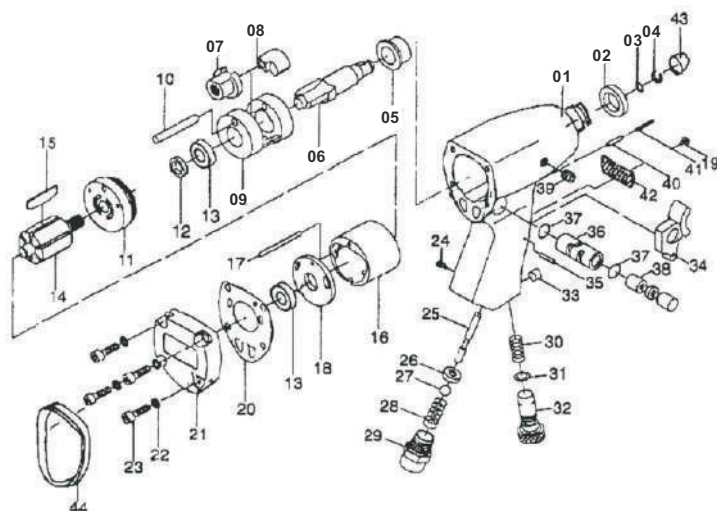

Features

- Ergonomic Rubber Grip, Handle Bottom Speed Control Design
- Horizontal Trigger, Compressed Fit On Hammer Pin & Cage
- Ideal For Light Duty Tire Changing And General Assembling Work
- Front Exhaust

Specifications

Part No.	Description	Qty.
01	Motor	1
02	Oil Seal	1
03	"O" Ring	1
04	Socket Retainer	1
05	Spindle Bush	1
06	Anvil Shank	1
07	Driver Cam	1
08	Hammer Dog	1
09	Hammer Cage	1
10	Hammer Pin	1
11	Front End Plate	1
12	Oil Seal	1
13	Ball Bearing	1
14	Rotor	1
15	Rotor Blade	6
16	Cylinder	1
17	Dower Pin	1
18	Rotor End	1
19	Screw	1
20	Motor Gasket	1
21	Housing Cap	1
22	Washer	1

Part No.	Description	Qty.
23	Cap Washer	1
24	Screw	1
25	Valve Pin	1
26	"O" Ring	1
27	Stall Ball	1
28	Spring	1
29	"O" Ring	1
30	Air Regulator	1
31	Pin	1
32	Trigger	1
33	Pin	1
34	Reverse Lever	1
35	"O" Ring	1
36	Reverse Valve	1
37	"O" Ring	2
38	Reverse Valve	1
39	Screw	1
40	Pin	1
41	Spring	1
42	Deflector	1
43	Rubber Nose Guard	1
44	Rubber	1

MODEL	:	AT-5031SG	AIR HOSE	:	3/8"
SQUARE DRIVE	:	3/8"	AVG. AIR CONSUMPTION	:	5.5 CFM
FREE SPEED	:	9000 RPM	WORKING PRESSURE	:	6.3 BAR
MAX TORQUE	:	176 NM	LENGTH× HEIGHT	:	172×136
AIR INLET	:	1/4"	WEIGHT	:	1.19 KG