


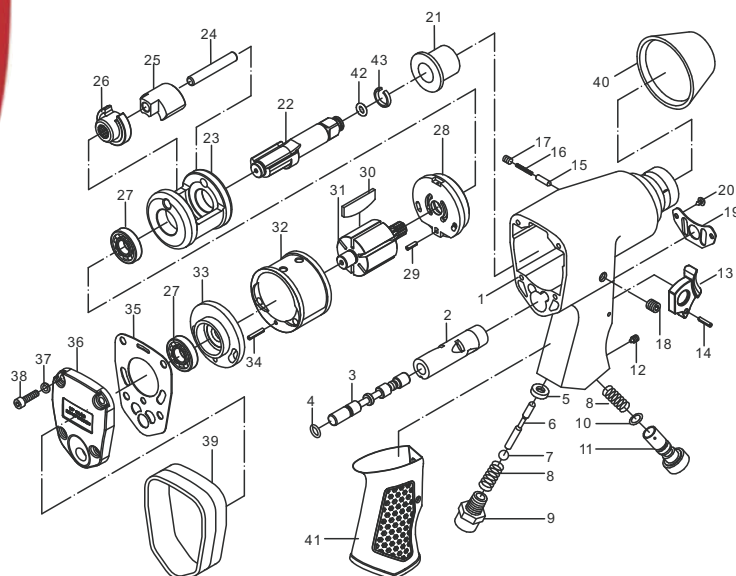

Features

- Die Cast Aluminium Body. Reversible
- Adjustable Torque. Rubber Scuff Guards On Nose And Back
- Built - In Air Regulator Varies Speed & Power
- Ideal For Tire Changing And General Assembling Work And Other Workshop Applications
- Front Exhaust

Part No.	Description	Qty.
1	Housing	1
2	Valvesleeve	1
3	F/R valve stem	1
4	O-ring	1
5	Gasket	1
6	Bolt	1
7	Steel ball	1
8	Spring	2
9	Inlet nipple	1
10	O-ring	1
11	Air flow regulator	1
12	Screw	1
13	Trigger	1
14	Trigger bolt	1
15	Bolt	1
16	Spring	1
17	Screw	1
18	Screw	1
19	Muffler	1
20	Screw	2
21	Axle sleeve	1
22	Anvil	1

Part No.	Description	Qty.
23	Hammer cage	1
24	Hammer pin	1
25	Hammer dog	1
26	Drive cam	1
27	Bearing	2
28	Front plate	1
29	Fixing pin	1
30	Rotor blade	6
31	Rotor	1
32	Cylinder	1
33	Rear plate	1
34	Fixing pin	1
35	Gasket	1
36	Rear cover	1
37	Cushion	4
38	Cap screw	4
39	Back rubber scuff	1
40	Front rubber scuff	1
41	Soft grip	1
42	O-ring	1
43	Ring	1

Specifications

MODEL	:	AT-5040B	AIR HOSE	:	3/8"
SQUARE DRIVE	:	1/2"	AVG. AIR CONSUMPTION	:	7.5 CFM
FREE SPEED	:	7000 RPM	WORKING PRESSURE	:	6.3 BAR
MAX TORQUE	:	340 NM	LENGTH × HEIGHT	:	205×200
AIR INLET	:	1/4 "	WEIGHT	:	2.18 KG