
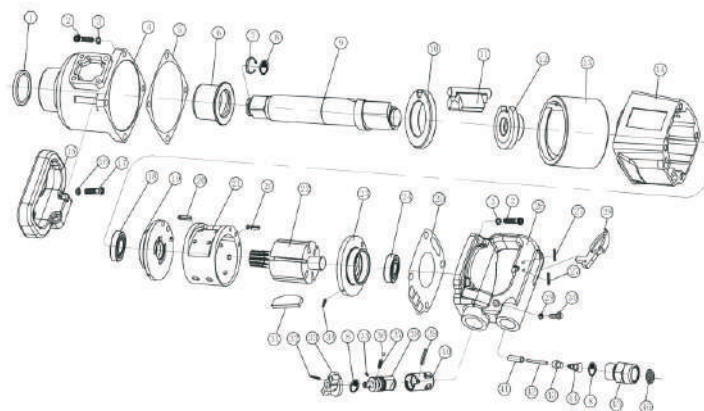




Features

- 3 - Position Power Regulator In Forward And Reverse
- Key Part/ Components Of High Precision And Heat Treatment Add Durability And Tool Life
- Removable Side Handle Provides Excellent Control
- Ideal For High Volume Repair Works On Big Trucks Tires And Heavy Equipment
- Side Exhaust

Part No.	Description	Qty.	Part No.	Description	Qty.
1	oil seal	1	24	end plate	1
2	screw	8	25	rear cover gasket	1
3	spring washer	8	26	rear cover	1
4	front motor housing	1	27	trigger pin	2
5	hammer case gasket	1	28	trigger	1
6	bushing	1	29	O-ring	1
7	anvil ring	1	30	screw	1
8	O-ring	3	31	rotor blade	6
9	anvil	1	32	knob pin	1
10	hammer pin	1	33	knob	1
11	hammer	1	34	end plate pin	1
12	hammer cage	1	35	knob limit pin	1
13	hammer frame	1	36	steel ball	1
14	housing	1	37	spring	1
15	handle	1	38	reverse knob	1
16	spring washer	4	39	reverse valve pin	1
17	screw	4	40	reverse valve bushing	1
18	front bearing	1	41	air inlet bushing	1
19	front end plate	1	42	air inlet pin	1
20	cylinder pin	2	43	air closer	1
21	cylinder	1	44	spring	1
22	rotor	1	45	air inlet	1
23	rear end plate	1	46	filter	1

Specifications

MODEL	:	9961	OVERALL LENGTH	:	540 MM
SQUARE DRIVE (INCH)	:	1"	AIR INLET (PT)	:	1/2"
CAPACITY BOLT SIZE	:	45 MM	AIR HOSE (ID)	:	1/2"
FREE SPEED (RPM)	:	4000	NET WEIGHT	:	13 KG
MAX TORQUE	:	2600 NM	PACKING	:	01 PCS/ CTN
AIR CONSUMPTION	:	250L/MIN	PCS/CTN/CUFT	:	625×235×320MM