
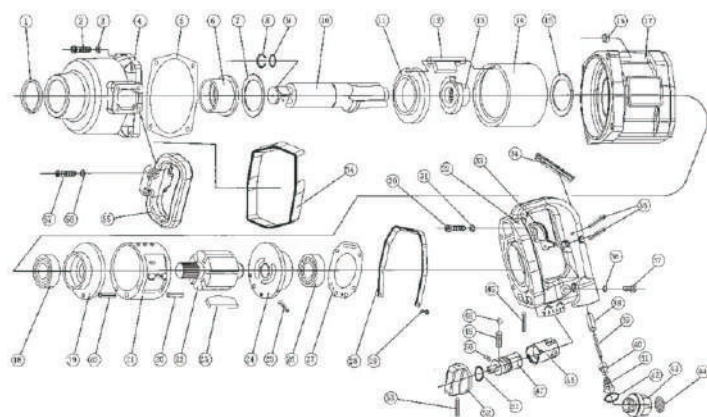




Features

- 3 - Position Power Regulator In Forward And Reverse
- Key Part/components Of High Precision And Heat Treatment Add Durability And Tool Life
- Removable Side Handle Provides Excellent Control
- Ideal For High Volume Repair Works On Big Trucks Tires And Heavy Equipment
- Side Exhaust

Part No.	Description	Qty.	Part No.	Description	Qty.
1	oil seal	1	30	screw	4
2	screw	4	31	spring washer	4
3	spring washer	4	32	rear cover	1
4	hammer case assembly	1	33	trigger	1
5	hammer case gasket	1	34	trigger protecting bai	1
5	bushing	1	35	trigger Pin	2
7	retainer washer	1	36	o-ring	1
8	retainer Ring	1	37	screw	1
9	o-ring	1	38	air inlet bushing	1
10	anvil	1	39	air inlet pin	1
11	hammer cage lining	1	40	air closer	1
12	hammer	1	41	spring	1
13	cam	1	42	o-ring	1
14	hammer frame	1	43	air inlet	1
15	rear washer	1	44	filter	1
16	screw nut	4	45	reverse valve pin	1
17	housing	1	46	reverse valve bushing	1
18	front bearing	1	47	Reverse Knob	1
19	front end plate	1	48	steel baU	1
20	cylinder pin	2	49	Spring	1
21	cylinder	1	50	knob limit pin	1
22	rotor	1	51	o-ring	1
23	rotor blade	6	52	knob	1
24	rear end plate	1	53	knob pin	1
25	end plate pin	1	54	housing ring	1
26	rear bearing	1	55	handle	4
27	rear cover gasket	1	56	spring washer	4
28	rear cover protector	1	57	screw	
29	screw	2			

Specifications

MODEL	:	AT-9971	OVERALL LENGTH	:	540 MM
SQUARE DRIVE (INCH)	:	1"	AIR INLET (PT)	:	1/2"
CAPACITY BOLT SIZE	:	45 MM	AIR HOSE (ID)	:	1/2"
FREE SPEED (RPM)	:	4000	NET WEIGHT	:	13 KG
MAX TORQUE	:	2800 NM	PACKING	:	01 PCS/CTN
AIR CONSUMPTION	:	250L/MIN	PCS/CTN/CUFT	:	675×235×355MM